

Assembly Instructions


Before you begin, please make sure all parts and proper quantities are included. (See Part Identifier Key) Any parts damaged during shipment must be reported within 24 hours of receipt. To report information regarding damages or if you have any questions, please call 800.242.2303.

Step 1:

- Place top face down on protected surface so threaded inserts are facing up.

Step 2:

- Align ELO straight leg with threaded inserts.
- Connect leg to desktop with the 1/4"-20x15mm joint connector bolts.
- Use a screw gun, 4mm Hex bit and a drill bit extension to tighten the joint connector bolts to the desktop.
- Repeat this for the rest of the legs and pedestal.

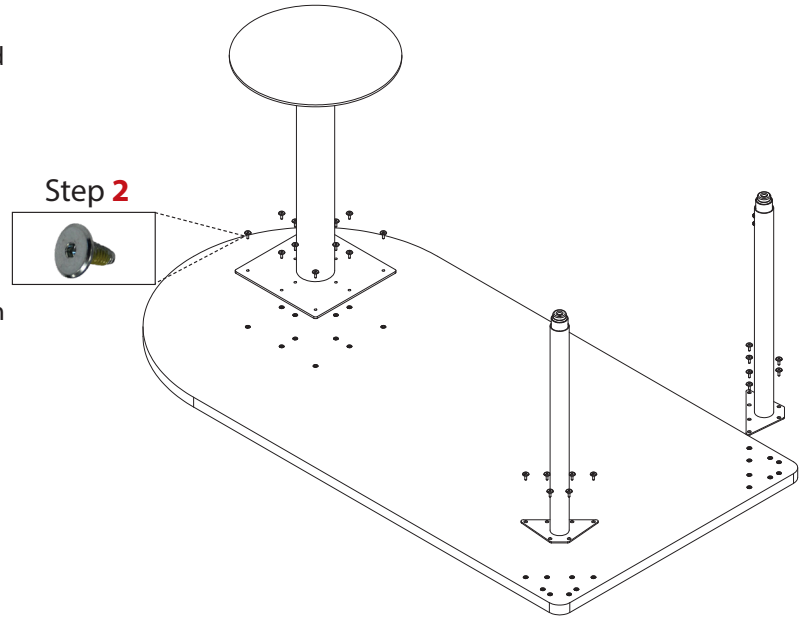

Step 3:

- Adjust legs to match the height of the pedestal and then with someone's help, flip table over.

Tools Required

- Screw gun
- 4mm Hex bit
- Drill bit extension

Part Identifier Key

Model #	Smooth Silver Sku #	Black Sku#	Description	Height"
ELSG	04066821-G4	04066821	ELO [®] 2" Straight Round Adj. Leg (ELSG)	21, 24, 28, 35 & 39

H"	Pedestal Base #	Top D"	Silver Sku #	Black Sku#	Pedestal Base #	Top D"	Silver Sku #	Black Sku#	Pedestal Base #	Top D"	Silver Sku #	Black Sku#
22.25	1844	24, 30, 36	0409895-21-S	0409895-21-B	2244	42, 48	0402016-21-S	0402016-21-B	2267	60		
25.25	1844	24, 30, 36	0409895-24-S	0409895-24-B	2244	42, 48	0402016-24-S	0402016-24-B	2267	60		
29.25	1844	24, 30, 36	0409895-28-S	0409895-28-B	2244	42, 48	0402016-28-S	0402016-28-B	2267	60		
36.25	1844	24, 30, 36	0409895-35-S	0409895-35-B	2244	42, 48	0402016-35-S	0402016-35-B	2267	60		
40.25	1844	24, 30, 36	0409895-39-S	0409895-39-B	2244	42, 48	0402016-39-S	0402016-39-B	2267	60		

Part #	Description	Qty.
04009023	1/4"-20x15mm joint connector bolts <i>(Used to fasten leg to top)</i>	<ul style="list-style-type: none"> 6 per leg 12 per pedestal

Assembly Instructions

Before you begin, please make sure all parts and proper quantities are included. (See Part Identifier Key) Any parts damaged during shipment must be reported within 24 hours of receipt. To report information regarding damages or if you have any questions, please call 800.242.2303.

Step 1:

- Remove Nylon glide from leg by rotating counterclockwise until glide is free.



Step 2:

- Place stem of Grand Hank glide into the hole on the leg. Rotate clockwise until fully inserted into leg.



Step 4:

- Repeat for each Grand Hank glide.

Tools Required

- 1/2" Wrench

ELO[®] Court Team Table

with Backpack Hook

Step 1:


- Place top face down on protected surface.

Step 2:

- Align tabs of the backpack hook with the metal inserts.

Step 3:

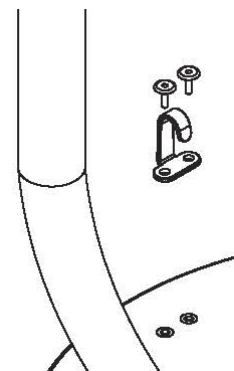

- Use 1/4"-20x15mm joint connector bolts to fasten both of the tabs of the backpack hook to the top.



Tools Required

- Screw gun
- 4mm Hex bit

Part Identifier Key

Part #	Description	Qty.	
040164	1 3/8 Dia. Grand Hank glides, 3/8-16 x 1"	1 per leg	
04009308-X1 (black) 04009308-G4 (smooth silver)	Backpack hook <i>(Needs (2) 1/4"-20x15mm joint connector bolts)</i>	1	
04009023	1/4"-20x15mm joint connector bolts <i>(Used to fasten backpack hook)</i>	2 per backpack hook	