

specifications

General Locker

Nominal Dimensions:

- Width: 12, 15, 18, 21, 24
- Depth: 12, 15, 18, 21, 24
- Height: 48, 60, 72, 84

Assembly:

- Factory assembled

Platform Base:

- Field installed and/or fabricated, plywood or decorative kick trim available

Platform Base nominal dimensions:

- Height: 4" nominal
- Width: 3" less than locker depth (i.e. 21" d locker = 18" w (deep) platform base)
- Length: Full length of locker run except at finished ends – 1/2" recess at finished ends

Typical Configurations at 72" tall locker:

- 1 Door: 1 fixed shelf above 2 coat hooks, keyed lock, number plate
- 2-3 Doors: 2 coat hooks, keyed lock, number plate
- 4-6 Doors: keyed lock, number plate
- 2 Door Z: (available in a laminate flat slab) 1 coat hook, keyed lock, number plate, European hinge

Handle & Lock Placement:

- Field installed
- Factory located, typically centered vertically along edge of door, with consideration given to lock type, pull or knob style, mirrors and other accessories

Fillers, End Panels and Similar Accessories:

- Field installed or fabricated except as noted below
- Field supplied installation hardware, fasteners and cleats

Materials:

- As noted below

Interiors

Sides, Shelves, Partitions:

- 3/4" thick, 45 lb density, industrial grade particle board core, white melamine, both faces

Back:

- 1/2" thick 45 lb density, industrial grade particle board core, white melamine, both faces
- Recessed 3/8"

Case Edges:

- Front Edge: PVC, Veneer
- Top, bottom and back edges not banded

Venting Recess:

- Top, bottom and horizontal partitions; 3/8"

Locks and Exterior Accessories (Field Installed)

Keyed Deadbolt :

- Two keys supplied per lock

Cam Padlock Hasp:

- Protective, clear cover plate to prevent owner supplied lock from damaging decorative surface of the door, affixed with four fasteners, stainless steel and brass cover plates also available

Keyed Combination Lock:

- Three number combination, five changeable combination choices, two master keys supplied per job

Electronic Keypad Lock:

- Keypad with input button, manual turn knob with cam lever assembly, control key override, 4-digit user code, 6-digit control code (Call for availability)

Coat Hook:

- Two single-prong chrome or brass, side mounted in compartments that exceed 30" in height

Number Plates: Field Installed:

- 1" x 2" chrome or brass with black numbers, factory located with pre-drilled holes, field installed with black fasteners

Fillers and Sloped Tops (Field Installed)

End Panels:

- Style/Material (see door section for construction): high pressure laminate, wood veneer, wood raised panel

Corner Top Filler Panel:

- 27" x 27" melamine (field supplied mounting hardware/cleats)

Filler Panel:

- 12" wide by the height of the locker, matches door stock

Sloped Top: available in flat slab only

- 1" deeper than the locker depth to allow for a 6" rise in back
- One, 8" panel; two, triangle end panels; L-brackets (mounting hardware/cleats)

Vertical Corner Filler:

- Field fabricated "L" from 12" wide filler panels as described above

Hardware

Hinges:

- Mounted right or left (right typical)
- Blum European style clip hinge with separate base plate, 120° opening, adjustable in all planes of operation
- Two hinges on doors up to 42" long, three hinges on doors that exceed 42" long; louver and other styles available
- Nickel finish

Doors

Number of Doors: 1, 2, 3, 4, 5, 6 and 2 Door Z

Reveal: 1/8" all around

Style / Material:

- High pressure laminate flat slab
- Wood veneer flat slab
- Wood raised panel

High Pressure Laminate Flat Slab Doors, End Panels and Acces.

Core:

- 3/4" thick, 45 lb density industrial grade particle board core, decorative high pressure laminate face, balancing backer

Edges:

- PVC or veneer

Veneer Flat Slab Doors and End Panels:

Core:

- 3/4" thick 45 pound medium density fiberboard laminated on both sides with A-1 grade wood veneer

Edges:

- PVC or veneer

Clear Coat:

- Two coats of clear catalyzed lacquer all veneer surfaces, scuff sanded between coats

Stain:

- Stain formulation must be clearly documented to describe materials, suppliers and mixing ratios

Wood Raised Panel Doors and End Panels

Framing:

- 3/4" thick select solid wood stiles and rails, 2 1/4" wide, typical

Panels:

- Solid wood or veneer composite center, sized to allow for expansion and contraction within the stiles and rails

Profile / Style:

- Square raised panel with radius edges, 50/50 split with center rail for doors over 42" long, louver and other styles available

Clear Coat:

- Two coats of clear catalyzed lacquer on all surfaces, scuff sanded between coats

Stain:

- Stain formulation must be clearly documented to describe materials, suppliers and mixing ratios

Accessories

Cantilevered Shelf

Fixed Shelf

Lock Box Unit

Shoe Shelf Cubbies

Knob

Lever Handle

5"x7" Mirror

Adjustable Shelf

Garment Rod with Hooks

Drawer with or without Lock


Name Plate

Wire Pull

4" Kick Trim


Digilock® is a registered trademark of Digilock

specifications

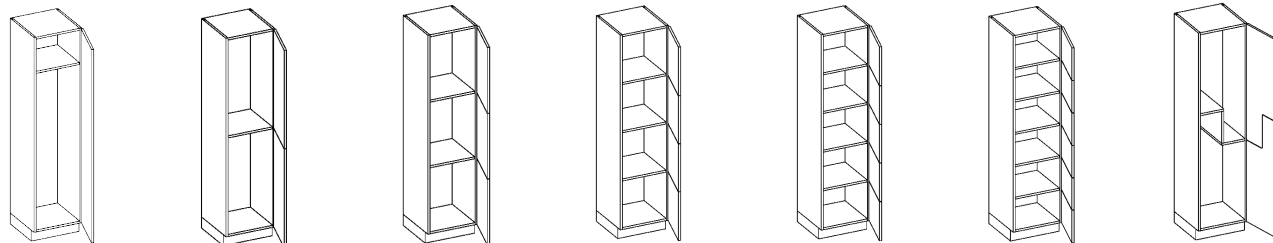


Model #	Model #	Model #	Model #	Model #	Model #	Model #
1T - 1 Tier	2T - 2 Tier	3T - 3 Tier	4T - 4 Tier	5T - 5 Tier	6T - 6 Tier	2DZL - Double Z
W: 12, 15, 18, 21, 24" H: 48, 60, 72, 84" D: 12, 15, 18, 21, 24" 1 Compartment with: Shelf, Door, Right European Hinge, 2 Coat Hooks	W: 12, 15, 18, 21, 24" H: 48, 60, 72, 84" D: 12, 15, 18, 21, 24" 2 Compartments each with: Door, Right European Hinge, 2 Coat Hooks	W: 12, 15, 18, 21, 24" H: 48, 60, 72, 84" D: 12, 15, 18, 21, 24" 3 Compartments each with: Door, Right European Hinge, 2 Coat Hooks	W: 12, 15, 18, 21, 24" H: 48, 60, 72, 84" D: 12, 15, 18, 21, 24" 4 Compartments each with: Door, Right European Hinge	W: 12, 15, 18, 21, 24" H: 48, 60, 72, 84" D: 12, 15, 18, 21, 24" 5 Compartments each with: Door, Right European Hinge	W: 12, 15, 18, 21, 24" H: 48, 60, 72, 84" D: 12, 15, 18, 21, 24" 6 Compartments each with: Door, Right European Hinge	W: 12, 15, 18, 21, 24" H: 48, 60, 72, 84" D: 12, 15, 18, 21, 24" 2 Compartments each with: Door, Right European Hinge, 2 Coat Hooks (Available in lami- nate doors only)

Finish Panels:

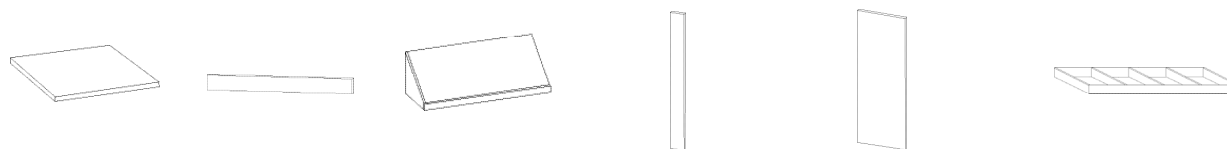


Model # CF	Model # KT	Model # ST	Model # FL	Model # FEP	Model # ULB
W: 12, 15, 18, 21, 24" H: 48, 60, 72, 84" D: 12, 15, 18, 21, 24" Corner Filler, White Melamine, Raw Edges, Field Assembly Required	W: 12, 15, 18, 21, 24" H: 48, 60, 72, 84" D: 12, 15, 18, 21, 24" Kick Trim, Raw Edges, One Face is Finished, Field Cutting Required	W: 12 to 48" (3" increments) H: As Needed D: As Needed Sloped Top, 1.75" Front Face, Vertical Wood Grain (flat panel with horizontal grain available upon request)	W: 3, 6, 12, 24" H: 96" D: 0.75" Filler Panel, Finished on Short Edges and One Face Field Cutting Required	W: 0.75" H: As Needed D: As Needed Finished End Panel, Finished on One Face and 3 Edges	W: 96" H: 4, 6" D: Based on locker depth Plywood Ladder Base, Unfinished Plywood Strips Field Assembled Covers 8 Linear Feet

Locker Configurations:



Available in 1-6 doors
or 2-door Z.
Customization available.
(Z door available in laminate only).

Panel Options:

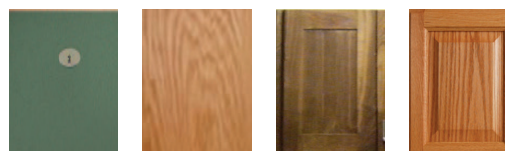

Laminate Wood Veneer Wood Flat Panel Wood Raised Panel


World Famous Locker Features:



Standard keyed deadbolt (Pull
required with this lock)



Knob pull (option)




Contemporary pulls
(option)



Recessed pull (option)



Cam padlock hasp
(optional with or w/o pull)



Number plates (optional
round or rectangular)



Keyed combination
lock (optional)



Zephyr Electronic Lock**
(optional)



6-point adjustable
hinge (standard)



Built in door vent
(standard)



Garment rod
(optional)



Coat hook (2 standard
on 1, 2 & 3 Tier)

**ADA locks available upon request. Contact Customer Service for availability.

V053017 Specs subject to change.